



SHI PRODUCT PASSPORT

Find products. Certify buildings.

SHI Product Passport No.:

12049-10-1027

Kontur FSP 1-034

Product group: Glass wool



Saint-Gobain Isover G + H AG
Bürgermeister-Grünzweig-Straße 1
67059 Ludwigshafen



Product qualities:



Köttner

Helmut Köttner
Scientific Director
Freiburg, 09 January 2026



Product:

Kontur FSP 1-034

SHI Product Passport no.:

12049-10-1027



Contents

■ SHI Product Assessment 2024	1
■ QNG - Qualitätssiegel Nachhaltiges Gebäude	2
■ DGNB New Construction 2023	3
■ DGNB New Construction 2018	5
■ BNB-BN Neubau V2015	6
■ EU taxonomy	7
■ BREEAM DE Neubau 2018	8
Product labels	9
Legal notices	10
Technical data sheet/attachments	10

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar





Product:

Kontur FSP 1-034

SHI Product Passport no.:

12049-10-1027



SHI Product Assessment 2024

Since 2008, Sentinel Holding Institut GmbH (SHI) has been establishing a unique standard for products that support healthy indoor air. Experts carry out independent product assessments based on clear and transparent criteria. In addition, the independent testing company SGS regularly audits the processes and data accuracy.

Criteria	Product category	Assessment
SHI Product Assessment		Not relevant for assessment



Product:

Kontur FSP 1-034

SHI Product Passport no.:

12049-10-1027



QNG - Qualitätssiegel Nachhaltiges Gebäude

The Qualitätssiegel Nachhaltiges Gebäude (Quality Seal for Sustainable Buildings), developed by the German Federal Ministry for Housing, Urban Development and Building (BMWSB), defines requirements for the ecological, socio-cultural, and economic quality of buildings. The Sentinel Holding Institut evaluates construction products in accordance with QNG requirements for certification and awards the QNG ready label. Compliance with the QNG standard is a prerequisite for eligibility for the KfW funding programme. For certain product groups, the QNG currently has no specific requirements defined. Although classified as not assessment-relevant, these products remain suitable for QNG-certified projects.

Criteria	Pos. / product group	Considered substances	QNG assessment
3.1.3 Schadstoffvermeidung in Baumaterialien	12.3 Insulation materials made of artificial mineral fibres (AMF)	Hazardous substances / emissions	QNG ready
Verification: Technisches Datenblatt vom 02.05.25			



Product:

Kontur FSP 1-034

SHI Product Passport no.:

12049-10-1027



DGNB New Construction 2023

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings. The 2023 version sets high standards for ecological, economic, socio-cultural, and functional aspects throughout the entire life cycle of a building.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 03.05.2024 (3rd edition)	not applicable		Not relevant for assessment

Criteria	Assessment
EC01.1 Life cycle cost (*)	May positively contribute to the overall building score
Verification: U-Wert Tabellen, FVHF Leitlinien VHF	

Criteria	Assessment
EC02.6 Climate resilience (*)	May positively contribute to the overall building score
Verification: Technisches Datenblatt, Lambda-Werte	

Criteria	Assessment
ENV1.1 Climate action and energy (*)	May positively contribute to the overall building score
Verification: U-Wert Tabellen	

Criteria	Assessment
SOC1.1 Thermal comfort (*)	May positively contribute to the overall building score
Verification: U-Werte, Technisches Datenblatt	



Criteria	Assessment
SOC1.3 Sound insulation and acoustic comfort (*)	May positively contribute to the overall building score
Verification: Technisches Datenblatt dynamische Steifigkeit	

Criteria	Assessment
TEC1.3 Quality of the building envelope (*)	May positively contribute to the overall building score
Verification: Technisches Datenblatt	

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact, 29.05.2025 (4th edition)	40b Insulation boards and mats made of synthetic mineral fibres	Hazardous substances / emissions	Quality level 4
Verification: Blauer Engel Zertifikat Zeichenbenutzungsvertrages Nr. 35619			



Product:

Kontur FSP 1-034

SHI Product Passport no.:

12049-10-1027



DGNB New Construction 2018

The DGNB System (German Sustainable Building Council) assesses the sustainability of various types of buildings. It can be applied to both large-scale private and commercial projects as well as smaller residential buildings.

Criteria	No. / Relevant building components / construction materials / surfaces	Considered substances / aspects	Quality level
ENV 1.2 Local environmental impact	not applicable	not applicable	Not relevant for assessment



Product:

Kontur FSP 1-034

SHI Product Passport no.:

12049-10-1027



BNB-BN Neubau V2015

The Bewertungssystem Nachhaltiges Bauen (Assessment System for Sustainable Building) is a tool for evaluating public office and administrative buildings, educational facilities, laboratory buildings, and outdoor areas in Germany. The BNB was developed by the former Federal Ministry for the Environment, Nature Conservation, Building and Nuclear Safety (BMUB) and is now overseen by the Federal Ministry for Housing, Urban Development and Building (BMWSB).

Criteria	Pos. / product type	Considered substance group	Quality level
1.1.6 Risiken für die lokale Umwelt	36b Mineral and non-mineral interior insulations	VOC / biocides / hazardous substances / individual hazardous substances (formaldehyde) / halogenated blowing agents	Quality level 5

Verification: Blauer Engel Zertifikat vom 10.04.2024



Product:

Kontur FSP 1-034

SHI Product Passport no.:

12049-10-1027



EU taxonomy

The EU Taxonomy classifies economic activities and products according to their environmental impact. At the product level, the EU regulation defines clear requirements for harmful substances, formaldehyde and volatile organic compounds (VOCs). The Sentinel Holding Institut GmbH labels qualified products that meet this standard.

Criteria	Product type	Considered substances	Assessment
DNSH - Pollution prevention and control		Substances according to Annex C	EU taxonomy compliant
Verification: Blauer Engel Zertifikat vom 10.04.2024			



Product:

Kontur FSP 1-034

SHI Product Passport no.:

12049-10-1027



BREEAM DE Neubau 2018

BREEAM (Building Research Establishment Environmental Assessment Methodology) is a UK-based building assessment system that evaluates the sustainability of new constructions, refurbishments, and conversions. Developed by the Building Research Establishment (BRE), the system aims to assess and improve the environmental, economic, and social performance of buildings.

Criteria	Product category	Considered substances	Quality level
Hea 02 Indoor Air Quality			Not relevant for assessment



Product:

Kontur FSP 1-034

SHI Product Passport no.:

12049-10-1027



Product labels

In the construction industry, high-quality materials are crucial for a building's indoor air quality and sustainability. Product labels and certificates offer guidance to meet these requirements. However, the evaluation criteria of these labels vary, and it is important to carefully assess them to ensure products align with the specific needs of a construction project.



The *Blue Angel* ("Blauer Engel") ecolabel, awarded by the German Federal Environment Agency, is one of the oldest and most widely used ecolabels in Germany. It exists in several variants for many different product groups. Since the test criteria, such as threshold values, differ between these variants, it is important to consider each one individually when assessing indoor air quality.



Products bearing the Sentinel Holding Institute QNG-ready seal are suitable for projects aiming to achieve the "Qualitätssiegel Nachhaltiges Gebäude" (Quality Seal for Sustainable Buildings). QNG-ready products meet the requirements of QNG Appendix Document 3.1.3, "Avoidance of Harmful Substances in Building Materials." The KfW loan program Climate-Friendly New Construction with QNG may allow for additional funding.



Product:

Kontur FSP 1-034

SHI Product Passport no.:

12049-10-1027



Legal notices

(*) These criteria apply to the construction project as a whole. While individual products can positively contribute to the overall building score through proper planning, the evaluation is always conducted at the building level. The information was provided entirely by the manufacturer.


Find our criteria here: <https://www.sentinel-holding.eu/de/Themenwelten/Pr%C3%BCfverfahren%20f%C3%BCr%20Produkte>

The SHI Database is the first and only database for construction products whose comprehensive processes and data accuracy are regularly verified by the independent auditing company SGS-TÜV Saar



Publisher

Sentinel Holding Institut GmbH
Bötzingen Str. 38
79111 Freiburg im Breisgau
Germany
Tel.: +49 761 590 481-70
info@sentinel-holding.eu
www.sentinel-holding.eu

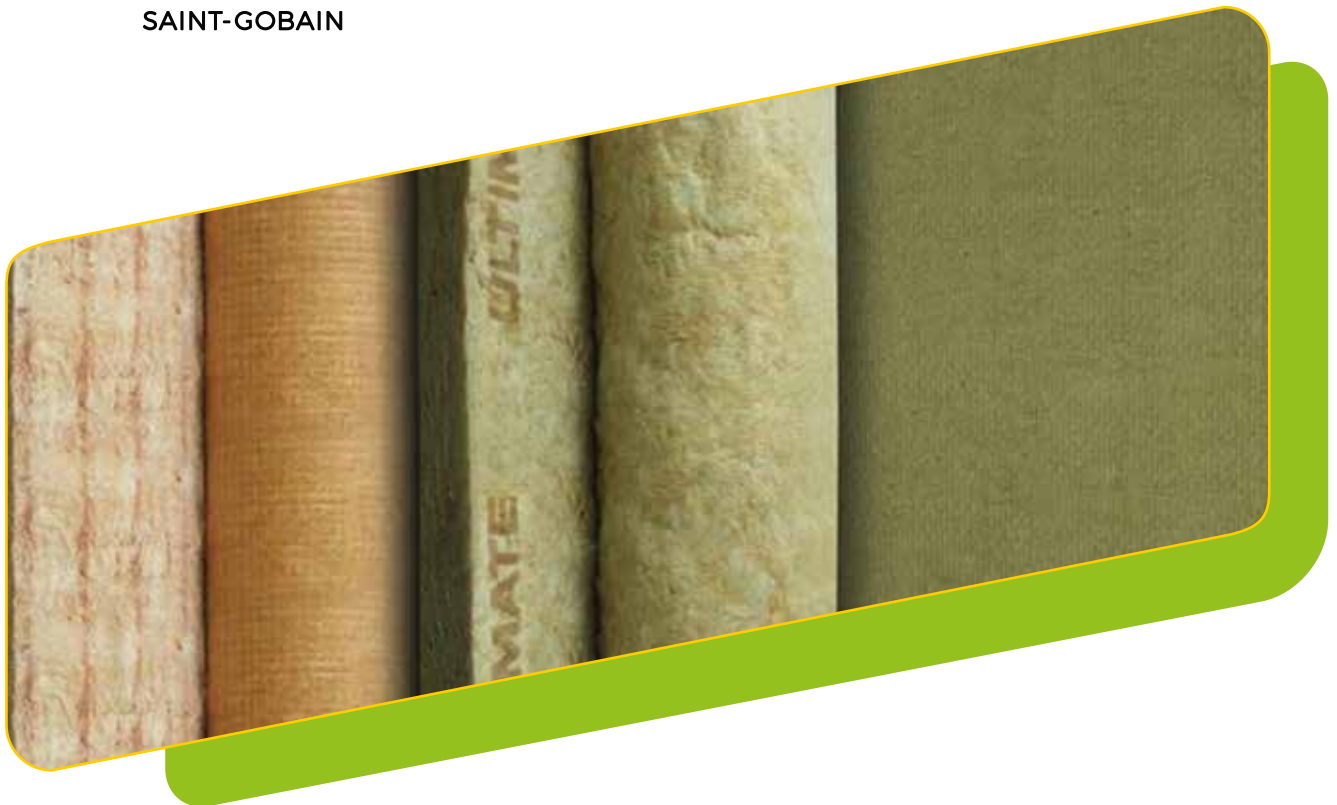

Kontur FSP 1-034

[Kontur FSP 1-035]

Fassaden-Dämmplatte aus Glaswolle

Anwendung

Fassaden-Dämmplatte für die außenseitige Wärmedämmung von Außenwänden mit hinterlüfteten, nichttransparenten bzw. opaken Fassadenbekleidungen. Insbesondere bei Fassadenbekleidungen mit offenen Fugen, ohne Beschränkung bei der Gebäudehöhe.

- bis zu 80% aus Recycling-Glas
- Wärmeleitgruppe 035
- Anwendungsgebiete nach DIN 4108-10 : WAB, WZ, DAD-dk, WI-zk
- Euroklasse A1 nichtbrennbar
- Witterungsschutz, da vlieskaschiert und wasserabweisend
- LABS-konform





Fassaden-Dämmplatte aus Glaswolle

Material

G3 touch Mineralwolle, hergestellt nach dem Glaswolle-Produktionsverfahren von SAINT-GOBAIN ISOVER, mit RAL-Gütezeichen der Gütegemeinschaft Mineralwolle e. V. und EUCB-Zertifikat, freigezeichnet nach Gefahrstoffverordnung, Chemikalienverbotsverordnung und Verordnung (EG) Nr. 1272/2008 Anmerkung Q

Kaschierung Oberseite / Sichtseite

Schwarzes Glasvlies

Anwendungsgebiete nach DIN 4108-10

WAB	Außendämmung der Wand hinter Bekleidung
WZ	Dämmung von zweischaligen Wänden, Kerndämmung
DAD-dk	Außendämmung von Dach oder Decke, vor Bewitterung geschützt, Dämmung unter Deckungen
WI-zk	Innendämmung der Wand, keine Anforderungen an Zugfestigkeit

Verarbeitungshinweise

- Kontur FSP 1-034 wird immer mit der Vlieskaschierung nach außen verlegt.
- Die Verarbeitung sollte lückenlos und flächenbündig auf dem Untergrund erfolgen.
- Die Platten werden mechanisch mit 5 Dämmstoffhaltern pro m² am Untergrund befestigt und ggf. zwischen die Unterkonstruktion geklemmt.
- Ab einem Fugenanteil von 5 % ist eine Fassadenbahn vorzusehen
- Zwecks 1-Dübel Montage setzen Sie sich bitte mit unserer Fachberatung Hochbau zwecks Beratung in Verbindung

Lagerungshinweis

In der Einzelverpackung, trocken und gegen mechanische Beschädigung geschützt lagern. Vorsichtig transportieren, nicht werfen. Kartonverpackte Produkte nicht auf Kante oder Ecke absetzen.

Technische Eigenschaften				
Eigenschaften	Zeichen	Einheit	Kenngößen und Messwerte	Normen
Bemessungswert der Wärmeleitfähigkeit	λ	W/(m·K)	0,035	DIN 4108-4
Nennwert der Wärmeleitfähigkeit	λ_D	W/(m·K)	0,034	DIN EN 13162
Wärmeleitgruppe	WLG	-	035	-
Euroklasse	-	-	A1 nichtbrennbar	DIN EN 13501
Brandverhalten	-	-	A1 nichtbrennbar	DIN EN 13501
Temperaturverhalten	-	°C	Verwendung bis 150	-
Spezifische Wärmekapazität	c	kJ/(kg·K)	1,03	DIN EN ISO 10456
Grenzabmessung für die Dicken	T	-	3	DIN EN 13162
Feuchtigkeitsverhalten	-	-	WL(P) durchgehend wasserabweisend	DIN EN 13162
Längenbezogener Strömungswiderstand	AF	kPa·s/m ²	≥10	DIN EN 13162
Glimmverhalten	NoS	-	Gemäß MVV-TB, Anhang 4, lfd. Nr. 1.3 Die Prüfung wurde bestanden: das Produkt zeigt keine Neigung zum kontinuierlichen Schwelen.	DIN EN 16733
Silikonfreiheit	-	-	frei von Emissionen von lackbenetzungsstörenden Substanzen	VW PV 3.10.7/3.2.1
Wasserdampf Diffusionswiderstandszahl	μ	-	1	DIN EN ISO 10456



Fassaden-Dämmplatte aus Glaswolle

Lieferformen DE

Bestell-Nr.	R _D -Wert	m ² /Paket	Pakete/Palette	m ² /Palette	Abmessung mm	Dicke mm
7833420	5,85	2,2500	16	36,000	1250 × 600	200
7833418	5,25	2,2500	16	36,000	1250 × 600	180
7833416	4,70	2,2500	16	36,000	1250 × 600	160
7833414	4,10	2,2500	16	36,000	1250 × 600	140
7833412	3,50	3,0000	16	48,000	1250 × 600	120
7833400	2,90	3,7500	16	60,000	1250 × 600	100
7833480	2,35	4,5000	16	72,000	1250 × 600	80
7833460	1,75	6,0000	16	96,000	1250 × 600	60

Passende Dämmstoffhalter: Kontur DH
 Artikel auf Anfrage: Mindestbestellmenge und Lieferzeiten beachten.
 220 und 240 mm auf Anfrage lieferbar.

Die Angaben in dieser technischen Information entsprechen dem Stand unseres Wissens und unserer Erfahrungen bei Drucklegung (vgl. Druckvermerk). Sofern nicht ausdrücklich anders vereinbart, stellen sie jedoch keine Garantie im Rechtssinne dar. Der Wissens- und Erfahrungsstand entwickelt sich stets weiter. Achten Sie deshalb bitte darauf, die neueste Auflage dieser technischen Informationen zu verwenden (zugänglich im Internet unter „www.isover.de“). Die beschriebenen Produktanwendungen können besondere Verhältnisse des Einzelfalles nicht berücksichtigen. Prüfen Sie deshalb unsere Produkte auf ihre Eignung für den konkreten Anwendungszweck. Wir liefern ausschließlich auf Grundlage unserer Allgemeinen Verkaufs- und Lieferbedingungen.

URKUNDE

SAINT-GOBAIN ISOVER G+H AG 67059 Ludwigshafen, Deutschland

wird aufgrund des Zeichenbenutzungsvertrages Nr. 35619 zur DE-UZ 132
Ausgabe 2020 das Recht verliehen, für das Produkt

ISOVER Wärme- und Trittschalldämmstoffe für Gebäude gemäß Anlage

das nachstehend abgebildete Umweltzeichen als Ausweis für die besondere
Umweltfreundlichkeit zu führen.



Bonn, den 10. April 2024

R. Wollmann

Geschäftsführer
RAL gGmbH



Bundesministerium
für Umwelt, Naturschutz, nukleare Sicherheit
und Verbraucherschutz

Umwelt
Bundesamt





Simply Excellent.

Anlage zum Vertrag: ISOVER Wärme- und Trittschalldämmstoffe für Gebäude

Produktname	Anwendungstyp (DIN 4108-10)
Akustic EP 1	DES-sh
Akustic ES 1	DEO
Akustic HWP 4	WTH-sh, WZ
Akustic SSP 1	DI, WI-zk
Akustic SSP 2	DI, WI-zk
Akustic TAS	DI
Akustic TF	WTR
Insulsafe	DI, DZ, WH, WI, WTR
Akustic TF-035	WI-zk, WTR
Akustic TP 1	DI, WTR
Akustic TP 1-035	DI, WTR
Integra UKF-032	DI, DZ, WTR
Integra UKF-035	DI, WTR
Integra UMP-032	DAD-dk, DI, DZ, WAB, WH, WI-zk, WTR, WZ
Integra ZKF 1-032	DZ, WH
Integra ZKF 1-035	DAD-dk, DZ, WH
Integra ZKF 1-040	DZ, WH
Integra ZKF 2-035	DZ
Kontur HBP-032	DAD-dk, DZ, WH
Kontur FSP 1-032	WAB, WI-zk, WZ
Kontur FSP 1-032 Basis	WAB, WI-zk, WZ
Kontur FSP 1-035	WAB, WZ
Kontur FSP 1-035 Basis	WAB, WZ
Kontur FSP 1-040	WAB, WZ
Kontur HBF-032	DAD-dk, DZ, WH
Kontur HBF-035	DZ, WH
Kontur KP 1-032	WI-zk, WZ
Kontur KP 1-035	WI-zk, WZ
Kontur KR Xpress-032	WZ
Kontur KR Xpress-035	WZ
Kontur MSP-032	WAB, WZ
Metac UF-031	DAD-dk, DZ, WH
Metac UF-032	DAD-dk, DZ, WH
Metac UF-034	DAD-dk, DZ, WH
Metac UF-035	DAD-dk, DZ, WH
Metac UF/F-035	DAD-dk, DZ, WH
Metac UF-040	DAD-dk, DZ, WH
Metac UF/F-040	DAD-dk, DZ, WH



Simply Excellent.

Metac WF-032	WAB, WTR
Metac WF-035	WAB, WTR
Metac WF-040	WAB, WTR
Metac WP-032	WAB, WTR
Metac WP-035	WAB, WTR
Metac WP-035/V	WAB, WTR
Metac WP-040	WAB, WTR
Metac WS-032	WAB, WTR
Metac WS-035	WAB, WTR
Metac WS-040	WAB, WTR
Metac WS-PLUS-035	WAB, WTR
Metac WS-PLUS-040	WAB, WTR
TDPS	DES-sh
Topdec DF 1-035	DAD-dk, DI, DZ
Topdec DF 2-035	DZ
TW-KF	WTR
Uniroll Classic	DZ
WDF	DZ
Akustic EP Basic	DEO-dm
Akustic EP 2	DES-sm
Akustic EP 3	DES-sg
Akustic EP 5	DES-sh
Akustic HWP 1	WTH-sh, WZ
Akustic HWP 2	WTH-sh, WZ
Akustic HWP 3	WTH-sg, WZ
Akustic IW 2-035	WI-zg
Akustic SPH 30	DI, WI-zk, WTR
Akustic SPH 50	DI, WI-zk, WTR
Akustic SPT/G-VK	DES-sg
Integra AP Basic	DAD-dk, DZ
Integra AP SolidBlack	DAD-dk, DZ
Kontur BR Brandriegel *	WAB, WZ
Kontur MSP 2-035	WAB, WZ
Kontur FSP 2-035	WAB, WZ
Kontur FSP 4-035	WAB, WZ
KONTUR SPH 100	WAB, WZ
Protect BSP 100	DI, WI-zk, WI-zg, WTR
Protect BSP 30	DI, WI-zk, WTR
Protect BSP 40	DI, WI-zk, WTR
Protect BSP 50	DI, WI-zk, WTR
SAW	WI-zg



Simply Excellent.

SPH 115C/si	WAB, WZ
Kontur MSP 2-035	WAB, WZ
Topdec DP 1	DI
Topdec DP 3	DI, Wi-zk
Topdec EasyLoft	DAD-dg, DZ
Topdec Hardline	DI, WI-zk
Topdec Loft	DAD-dg, DZ
Topdec Soundline	DI, Wi-zk
Topdec Smartline	DI
Topdec Universal	DI, WI-zg
AP Supra-031	DAD-dk, DZ
AP SupraPlus-031	DAD-dk, DZ
BF-039	DZ, WH
BSP 30	DI, WH, Wi-zk, WTR
BSP 40	DI, WH, Wi-zk, WTR
DP 1-031	DI, WI-zk
FSP L-031	DZ, WAB, WI-zk, WZ
FSP-031	WAB, WZ
FSP-031 Basis	WAB, WZ
FSP-032	WAB, WZ
FSP-033	WAB, WZ
FSP-034	WAB, WZ
FSP-034 Basis	WAB, WZ
FSP-039	WAB, WZ
HBF-031	WH
HBF-034	WH
HBF-039	WH
HBP-031	WH
HBP-033	WH
HBP-034	WH
HBP-039	WH
HFP-031	WAB, WZ
KP-034	WZ
KR-Xpress-031	WZ
MBF-034	DI, DZ, WH, WI-zk, WTR
SBF-031	WH
Streifensickenfüller	DZ
TF-039	DI, WTR
TOPDEC DP 3-032	DI, WI-zk
Topdec DP-032	DI, Wi-zk
TP-039	DI, WI-zk, WTR



Simply Excellent.

UF-034	DAD-dk, DZ, WH
UF-039	DAD-dk, DZ, WH
UKF-034	DI, WTR
Vollsickenfüller	DZ
WF-034	WAB, WTR
WF-039	WAB, WTR
WP-031	WAB, WTR
WP-034	WAB, WTR
WSF PLUS-034	WAB, WTR
WSF-034	WAB, WTR
WSF-039	WAB, WTR
WSP PLUS-031	WAB, WTR
WSP PLUS-034	WAB, WTR
WSP PLUS-039	WAB, WTR
ZKF-031	DAD-dk, DZ, WH
ZKF-034	DAD-dk, DZ, WH
ZKF-039	DZ, WH